

THE LIGHT

lighting design & consulting




LINER 60

IP 20 IK 02 ~220-240V ≤3 MacAdam CE 50-60 Hz RG0 EN62471 Lifetime 50.000h


VARIATIONS



90° corner
opal / microprismatic

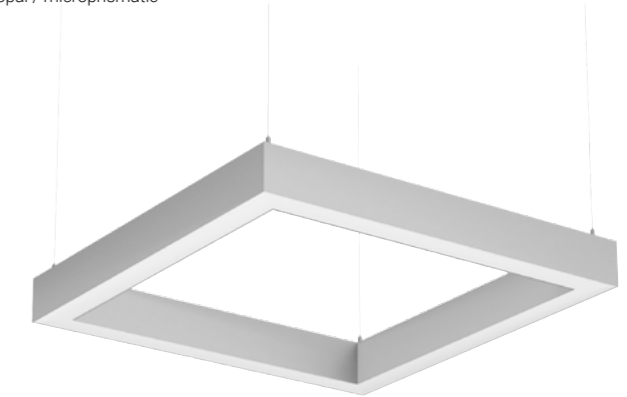

square
opal / microprismatic

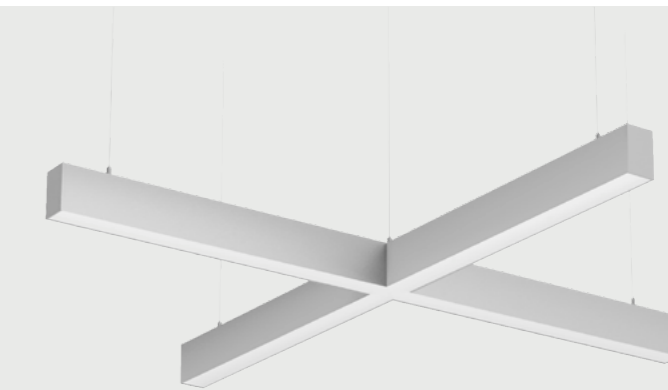

cross
opal / microprismatic

Let's get the light straight

The LINER 60, a fine-drawn LED luminaire is designed for interior lighting. It can be used in any type of space where there are high requirements for lighting quality, visual comfort and minimalist design, such as office or representative spaces.


The luminaire has a direct or direct-indirect distribution of luminous flux. Depending on the light distribution, it can be used as suspended, ceiling or wall-mounted, installed separately, in continuous lines or linear creative compositions.



DIMMENSIONS



LIGHT DISTRIBUTION

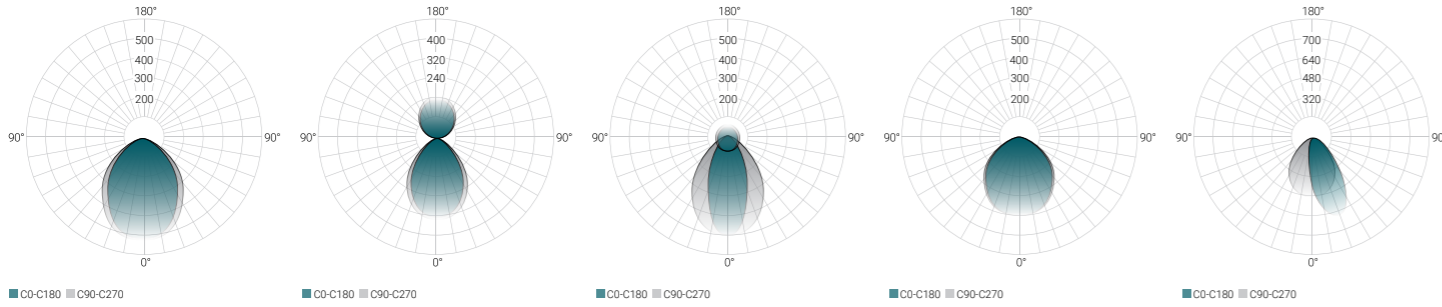

Microprismatic DIR M				Microprismatic DIR INDIR M				Microprismatic + DIR INDIR N				Opal DIR O				Wallwasher DIR W			
POWER (W)	LUMEN output (4000K)	LENGHT (mm)	WEIGHT (kg)	POWER (W)	LUMEN output (4000K)	LENGHT (mm)	WEIGHT (kg)	POWER (W)	LUMEN output (4000K)	LENGHT (mm)	WEIGHT (kg)	POWER (W)	LUMEN output (4000K)	LENGHT (mm)	WEIGHT (kg)	POWER (W)	LUMEN output (4000K)	LENGHT (mm)	WEIGHT (kg)
16	1338	566	1,7	23	2245	566	1,70	23	2560	566	1,7	16	1505	566	1,7	16	1728	566	1,7
31	2676	1126	3,4	46	4491	1126	3,40	46	5120	1126	3,4	31	3010	1126	3,4	31	3348	1126	3,4
39	3345	1406	3,98	58	5614	1406	3,98	58	6394	1406	3,98	39	3762	1406	3,98	39	4212	1406	3,98
47	4014	1686	4,83	69	6736	1686	4,83	69	7672	1686	4,83	47	4515	1686	4,83	47	5076	1686	4,83
62	5352	2246	6,53	92	8982	2246	6,53	92	10230	2246	6,53	62	6020	2246	6,53	62	6696	2246	6,53
78	6690	2806	7,95	115	11228	2806	7,95	115	12788	2806	7,95	78	7525	2806	7,95	78	8424	2806	7,95



ACCESSORIES



suspension set white
903016



suspension set black
903016B



middle suspension
bracket + suspension
LNRMIDSUS15

COLOURS



white

elox

black

other RAL colours
on request

ON REQUEST



Multisensor
daylight & presence

PRODUCT CODE

Code ordering example – **LNR60DDWW1F-830-L1126**

Product family	Type	Optical system	Surface finish	Control gear	Colour rendering	Colour temperature	Size	Custom on request
LNR60	LINER 60	DD DIR	O Opal	W White	1F nonDIM	8 CRI>80	22 2200K	L566 Special length version
		DI DIR/INDIR	M Microprismatic	E Elox	2F separate nonDIM	9 CRI>90	27 2700K	L1126 90 corner
		N Microprismatic+	U Black	1D DALI	C RGB	30 3000K	L1406 emergency module	
		W Wallwasher	* Custom	2D separate DALI	R R	35 3500K	L1686 multisensor	
				TD TouchDIM	G G	40 4000K	L2246	
				CB CASAMBI	B B	65 6500K	L2806	
				Sensor **			Custom L*	

The manufacturer reserves all rights to make changes in materials and components used in production of lighting fittings.

THE LIGHT
lighting design & consulting

+421 903 584 419, info@thelight.sk, www.thelight.sk